



FALCON FS320Z

Reach diagram — Optimised position

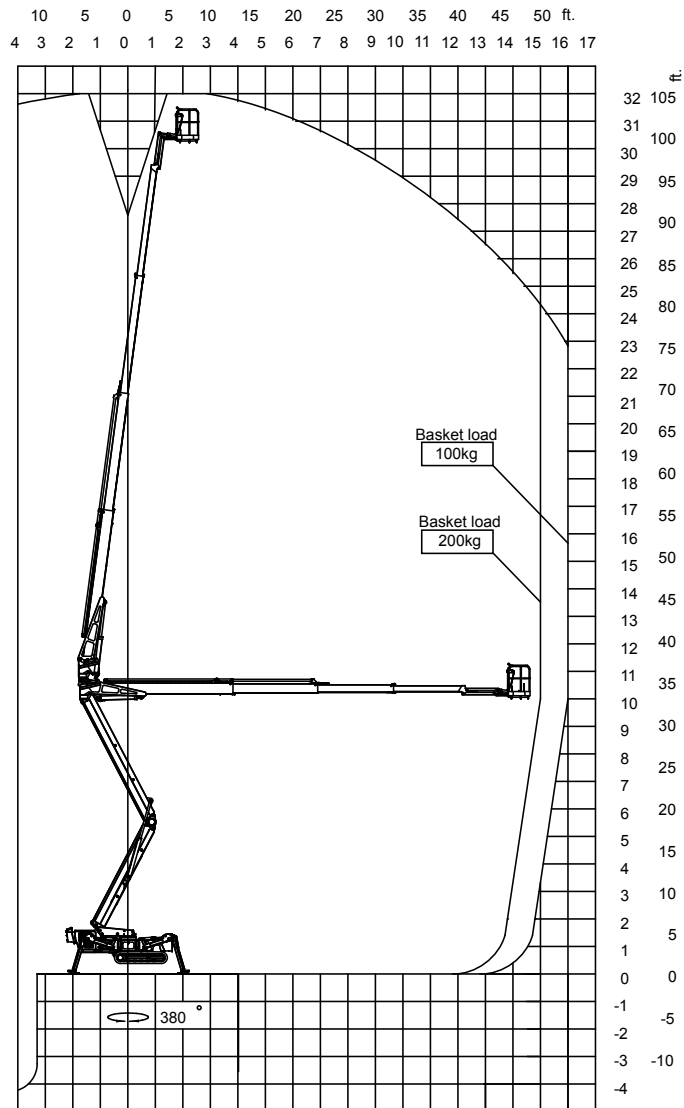


Reach with different basket load

Basket load 200 kg



Basket load 100 kg



All measurements in meters

TCA LIFT A/S

Tolderundsvej 106
DK • 5000 Odense C
Tel.: +45 66 13 11 00







www.tcalift.com

HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT

CONTACT US

0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com



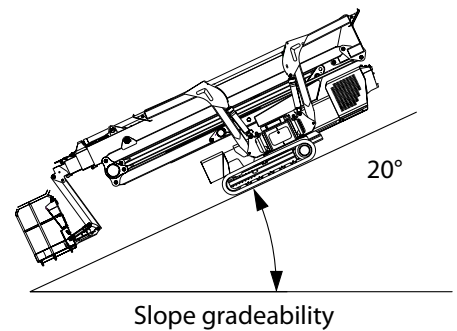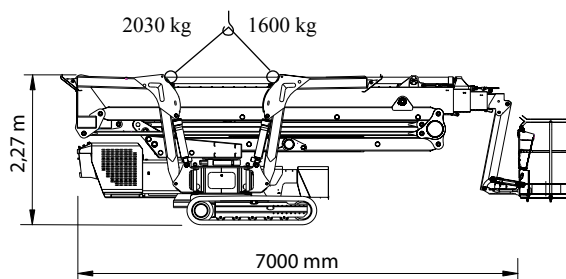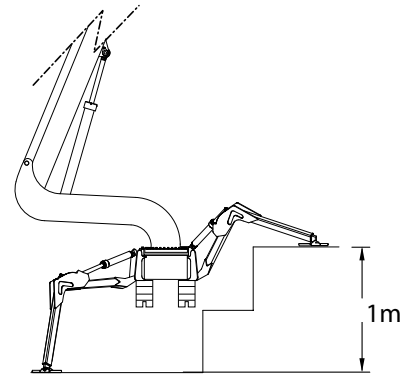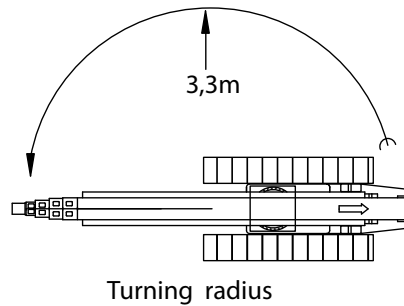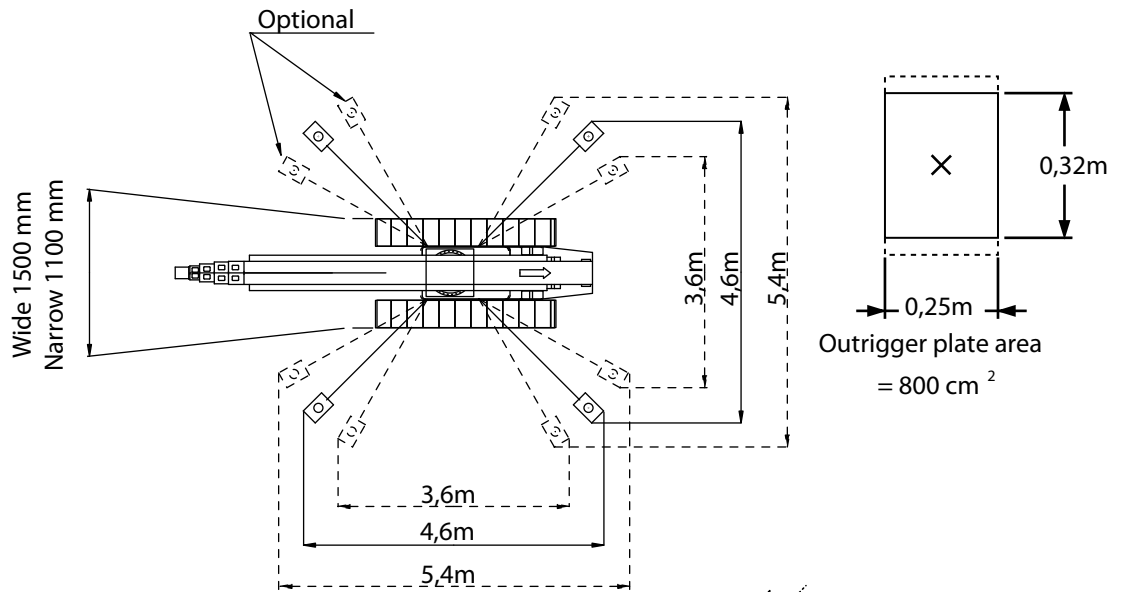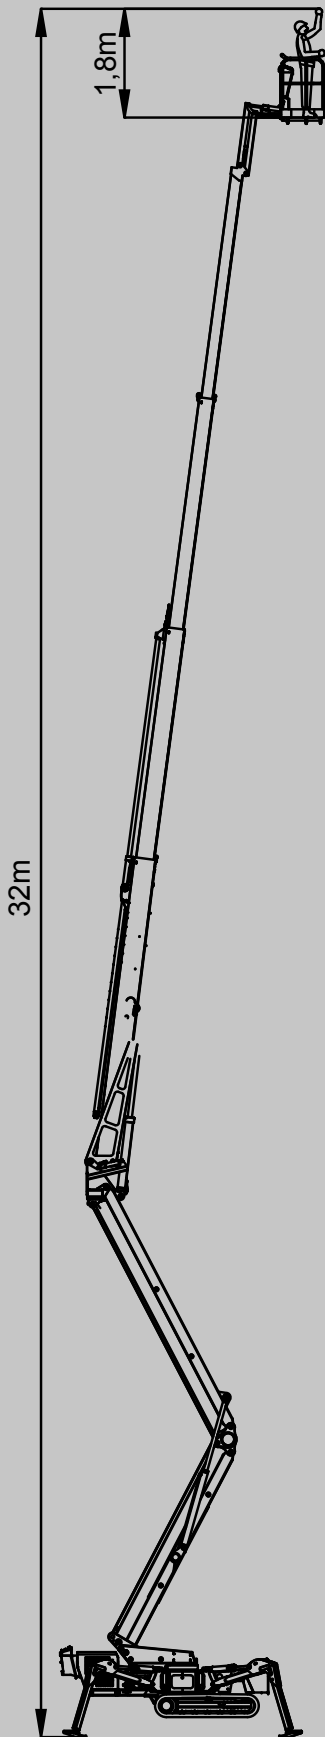

Additional info:

Weight and ground pressure:

Weight with standard equipment

5900 kg

Surface pressure under crawlers (soft surface)

0,85 kg/cm²

Surface pressure under crawlers (hard surface)

3,00 kg/cm²

Max. ground pressure under 1 outrigger plate

3,40 kg/cm²

