

Platform

0.91 m x 2.44 m low mount platform

Side entry with inward swing gate

Multiple function operation

Full proportional drive joystick control with integral thumb steer switch

Full proportional main boom and swing joystick control

Variable speed dial control for telescope, platform rotate and tower

2.44 m articulating jib

JibPLUS® with 4 way axis jib including 125 degree horizontal motion

Powered side stow on jib

180 degree powered platform rotator

Platform console machine status light panel ¹

Load sensing system

AC power cable to platform

Power & Transmission

Deutz TD2011L04 (56 kW) diesel engine

Gull-wing turntable hoods

Swing-out engine tray

Spark arresting type muffler

Control ADE™ - (Advanced Design Electronics System)

Adjustable swing drive

Hydrostatic transmission

Four wheel drive

Four wheel steer/Two Wheel Steer/Crab Steer

Horn

Functional Equipment & Accessories

Selectable dual platform capacity system (230kg/450kg)

QuikStik® boom design feature

Drive-out extending axles

5 degree tilt alarm and indicator light

445/50D710 foam filled lug tread tyres

Oscillating front axle

Lifting/tie down lugs

Hour Meter

Ground control selector switch with key lock

Load Sensing Hydraulics

Platform tool tray

12V-DC auxiliary power

Available Options

0.91 m x 1.83 m low mount platform

12 mm air line to platform

Engine distress warning system ²

On-board 2500W generator

SkyPower™ package 7,500 watt on-board generator

¹ Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

² Low oil pressure and high coolant temperature alarms with shut-down enabled/disabled by analyser.

³ Available when integrated with the SkyPower™ package.

⁴ Consists of six 40-watt lights, four turntable mounted lights and two platform mounted lights.

⁵ Includes all-motion alarm and flashing amber beacon.

⁶ Includes platform mounted work lights and head & tail lights.

⁷ Includes console cover, boom wipers and cylinder bellows.

Available Options

SkyWelder® package 250 amp welder in the platform ³

SkyGlazier™ package glass and panel tray

Nite-Bright® package ⁴

All motion alarm

Alarm Package ⁵

Light package ⁶

Flashing amber beacon

Plugs and sockets

Hostile environment package ⁷

Catalytic Purifier Muffler

Soft Touch Proximity System



Corner Storage tray



1250AJP

Platform height	38.30 m
Horizontal outreach	19.25 m
Up and over height	18.44 m
Swing (continuous)	360°
Platform capacity – restricted	450 kg
Platform capacity – unrestricted	230 kg
Platform rotator (hydraulic)	180°
Jib – overall length	2.44 m
Jib - range of articulation	130° Vertical (+75°/-55°)
JibPLUS® - range of articulation	125° Horizontal
A. Platform size	0.91 m x 2.44 m
B. Overall width (axles retracted)	2.49 m
Overall width (axles extended)	3.81 m
C. Tailswing (working condition)	0.91 m
D. Stowed height	3.05 m
E. Stowed length (transport position)	11.46 m
F. Wheelbase	3.81 m
G. Ground clearance	0.30 m
Machine weight ¹	21,000 kg
Maximum ground bearing pressure	7.03 kg/cm ²
Drive speed	5.2 km/h
Gradeability	45%
Tyres	445/50D710 Foam Filled
Axle oscillation	0.30 m
Turning radius – inside (axles retracted)	4.39 m
Turning radius – inside (axles extended)	2.44 m
Turning radius – outside (axles retracted)	6.86 m
Turning radius – outside (axles extended)	5.89 m
Diesel engine - Deutz TD201 1L04	56 kW
Fuel tank capacity	117 L
Hydraulic system	390 L
Auxiliary power	12V DC

¹ Certain options or country standards may increase weight and/or dimensions.

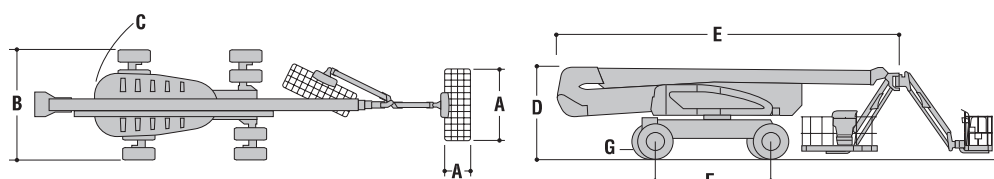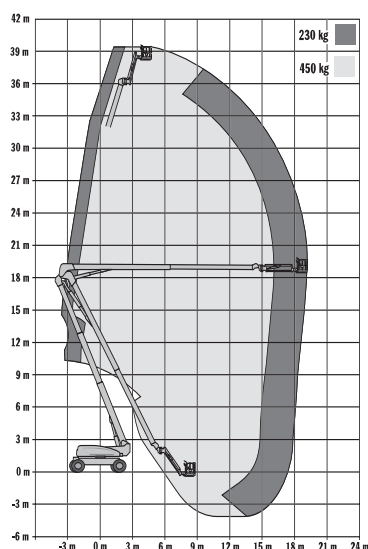

Fir Tree Farm
Warrington
Banbury
Oxfordshire
OX17 1JL

Junction Lane
Sankey Valley Ind Est
Newton-Le-Willows
Merseyside
WA12 8DN

0800 865 4455
info@hiresafesolutions.com
@HireSafeSol
facebook.com/hiresafesolutions

HireSafe
SOLUTIONS