



SJ9241 RT | SJ9250 RT ROUGH TERRAIN SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities — all in one package! Both the SJ9241 RT and SJ9250 RT feature an expansive platform, up to 7,2 m in length, when both 1,5 m powered extension decks are extended. With working heights up to 17,2 m and standard independent/auto leveling outriggers, these units can meet the needs of even the most challenging job sites.

An easily accessible Kubota diesel engine powers a robust axle based 4WD system with "no-spin" and limited slip differentials, delivering excellent job site terrainability.



SKYJACK



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

- ☎ 0800 865 4455
- ✉ info@hiresafesolutions.com
- 🌐 www.hiresafesolutions.com



ROUGH TERRAIN SCISSOR LIFT

SPECIFICATIONS

SJ9241 RT

SJ9250 RT

2006/42/CE

A Work Height	14,5 m	17,2 m
B Raised Platform Height	12,5 m	15,2 m
C Lowered Platform Height	1,7 m	2,0 m
D Overall Width	2,3 m	2,3 m
E Overall Length	4,5 m	4,5 m
F Stowed Height (Rails Up)	2,8 m	3,2 m
G Stowed Height (Rails Down)	2,0 m	2,3 m
H Platform Width (Inside Dimension)	1,9 m	1,9 m
Platform Length Stowed (Inside Dimension)	4,3 m	4,3 m
I Platform Length Extended (Inside Dimension)	7,2 m	7,2 m
Ground Clearance	0,2 m	0,2 m
Wheelbase	3,0 m	3,0 m
Weight	6715 kg	7407 kg
Gradeability	30%	30%
Turning Radius (Inside)	4,4 m	4,4 m
Turning Radius (Outside)	7,2 m	7,2 m
Lift Time (With Rated Load)	62 sec	64 sec
Drive Speed (Stowed)	3,8 km/h	3,8 km/h
Drive Speed (Raised)	0,72 km/h	0,72 km/h
Maximum Drive Height	Full Height	7,9 m
Capacity (Overall)	681 kg	681 kg
Maximum # of Persons	5	5


STANDARD FEATURES

- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota diesel engine on roll out tray
- Self centering scissor design
- Dual powered extension decks (1,5 m front and rear)
- Large 7,2 m total working platform length
- Independent/auto leveling outriggers
- Analog control system
- Colour coded and numbered wiring system
- 30% gradeability
- Foam-filled tyres
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Lowering warning system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Scissor guards
- Lanyard attachment points
- Tie down/lift lugs

OPTIONS‡

- Diesel engine with scrubber
- All motion audible alarm
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

‡Capacities, and machine weights may differ when options are added

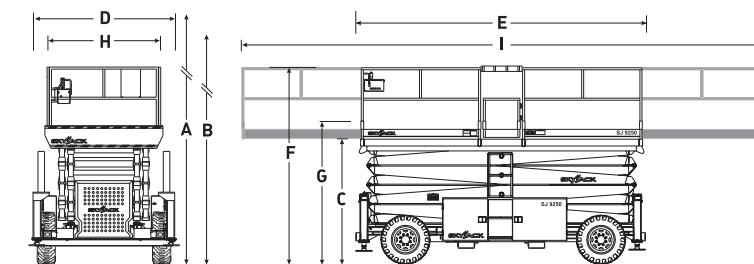

Model	Capacity With 2 Extension Decks		
	Main	Front Ext.	Rear Ext.
SJ 9241	227 kg	227 kg	227 kg
SJ 9250	227 kg	227 kg	227 kg

