
# 2100SJ

# MEGA TELESCOPIC BOOM LIFT



- 5 steering modes, including lateral drive for exceptional maneouverability
- Industry-leading outreach
- Secondary platform controls for precise positioning
- Patent pending design



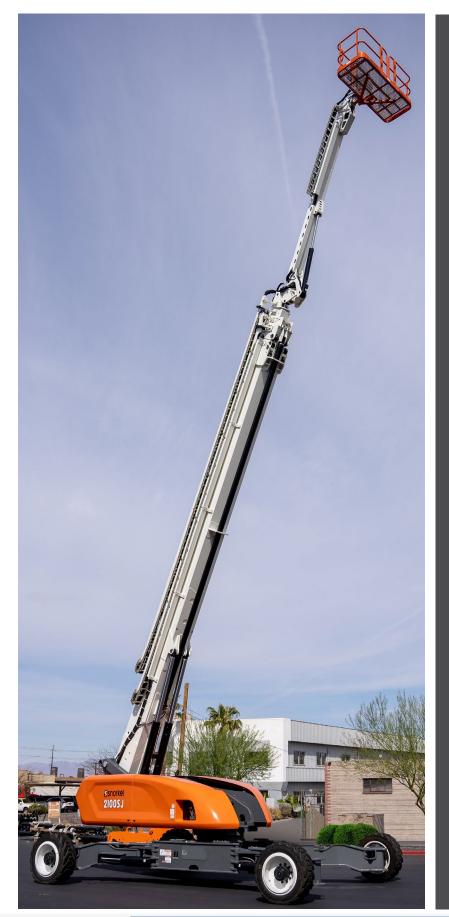

HONEST, RELIABLE क् REACTIVE SOLUTIONS FOR WORKING AT HEIGHT















- **©** 0800 865 4455
- info@hiresafesolutions.com
- ⊕ www.hiresafesolutions.com



## MEGA TELESCOPIC BOOM LIFT

# 2100SJ

DIMENSIONS	2100\$J*		
Max. working height	66.0m		
Max. platform height ( <b>A</b> )	64.0m		
Max. horizontal reach	35.1m		
Platform size	2.4m x 0.9m		
Overall width (axles retracted) (B)	2.5m		
Operational width (axles extended)	5.5m		
Stowed length ( <b>C</b> )	23m		
Transport length	15.5m		
Stowed height ( <b>D</b> )	3.0m		
Ground clearance	355mm		


PERFORMANCE	
Platform capacity (SWL) (unrestricted)	349kg
Platform capacity (SWL) (restricted)	454kg
Max. drive height	64.0m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	4.0km/h
Max. drive speed (elevated)	0.2km/h
Jib length	9.1m
Jib working arc	128° (-55° to +73°)
Platform rotation	150°
Superstructure rotation (continuous)	360°
Tailswing (axles retracted)	2.05m
Tailswing (axles extended)	0.7m
Raise/lower time	5/5.5 min
Gradeability	35%
Inside turning radius (axles retracted)	3.0m
Inside turning radius (axles extended)	2.6m
Outside turning radius (axles retracted)	5.0m
Outside turning radius (axles extended)	6.4m
Tyres	445/50-710 foam filled 24 ply
Controls	proportional joystick
Drive system	4-wheel drive
Working envelope volume	0.2 million m <sup>3</sup>


POWER			
Power source	Kubota V3800,	115hp diesel	- Stage V

## WEIGHT

Weight 41,730kg

### **WORKING ENVELOPE**





### STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Secondary platform controls
- 5 steering modes front axle, rear axle, crab, complementary & lateral
- All proportional controls
- Remote lower control panel
- Tool tray
- Hydraulic platform rotation
- 360° continuous turntable rotation
- Flashing amber light
- Dual lanyard attachment points
- Foam filled tyres
- 4-wheel drive
- Power line to platform
- Snorkel OnSite™ telematics 60 months
- Drive motion alarm
- 2 year parts & labour, 5 year structural warranty
- CE compliant

### **OPTIONS**

- Special paint colours
- Airline to platform
- Cold weather package
- Extreme cold weather package
- Extreme environment package
- Light package
- Glazier package
- Environmental hydraulic oil
- AC generator package 110V/240V



















