

## SPECIFICATIONS

Size	Metric	British
Max. Working Height <b>A</b>	19.00m	62' 4"
Max. Platform Height <b>B</b>	17.00m	55' 9"
Overall Length <b>C</b>	4.95m	16' 3"
Overall Width <b>D</b>	2.46m	8' 1"
Overall Height(Rails Up) <b>E</b>	3.61m	12'
Overall Height(Rails Down) <b>F</b>	2.75m	9'
Platform Size(Length×Width)	4.59m×2.25m	15' 1"×7' 5"
Platform Extension Size <b>G</b>	2.70m	9'
Ground Clearance	0.40m	1' 4"
Wheelbase <b>H</b>	3.3m	11'
Turning Radius(Inside/Outside)	1.25m/3.4m	4' 1"/11' 2"
Tyres	36×14-20	36×14-20

### Performance


S.W.L	750kg	1654lb
S.W.L On Extension	750kg	1654lb
Max. Occupants (Indoor/Outdoor)	4/4	4/4
Gradeability	30%	30%
Travel Speed(Stowed)	≥5.0km/h	≥3.10mph
Travel Speed(Raised)	≥0.4km/h	≥0.24mph
Max. Working Slope	2°/3°	2°/3°
Up/Down Speed	80/70sec	80/70sec

### Weight

Overall Weight(Lead-acid Battery)	13210kg	29123lb
Overall Weight(Lithium Battery)	12590kg	27756lb

### Power

Hydraulic Tank	150L	32gal
Battery	48V/630Ah	48V/630Ah
Charger	48V/60A	48V/60A
Driving Motor	4×32VAC/3.3kW	4×32VAC/3.3kW
Lifting Motor	2×48VDC/10.0kW	2×48VDC/10.0kW

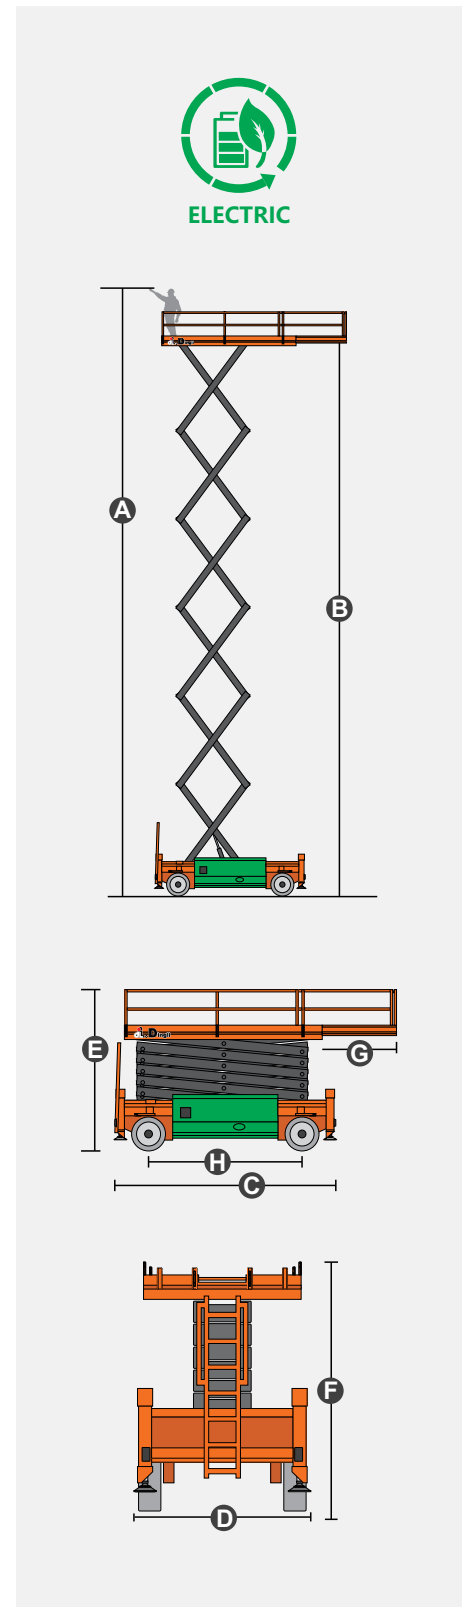

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Charging Indicator
- Drivable At Full Height
- Four-Wheel Drive
- Four-Wheel Steering
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System

