

Technical sheet :

# 220 TJ+






 **MANITOU**  
HANDLING YOUR WORLD



Capacities			Metric
Working height		h21	21.74 m
Floor height (access)		h20	0.39 m
Platform height		h7	19.74 m
Max. outreach			17.79 m
Pendular arm rotation (top / bottom)			+70 ° / -63 °
Platform capacity		Q	408 kg
Turret rotation			360 °
Platform rotation (right / left)			90 ° / 90 °
Number of people (indoor / outdoor)			3 / 3
Weight and dimensions			
Platform weight*			13600 kg
Platform dimensions (length x width)		lp / ep	2.30 m x 0.90 m
Overall length		l1	10.06 m
Overall width		b1	2.48 m
Overall height		h17	2.66 m
Overall length (stowed)		l9	7.35 m
Overall height (stowed)		h18	3.03 m
Jib length		l13	2 m
Counterweight offset (turret at 90°)		a7	1.34 m
Counterweight Oversize / Reach			1.35 m
External turning radius		Wa3	4.40 m
Ground clearance at centre of wheelbase		m2	0.44 m
Wheelbase		y	2.80 m
Performances			
Drive speed - stowed			4.90 km/h
Drive speed - raised			1 km/h
Gradeability			40 %
Permissible leveling			4 °
Wheels			
Tires type			Solid Tires Cured-On
Standard tires			40 x 14 in / 1025 x 365 mm
Drive wheels (front / rear)			2 / 2
Steering wheels (front / rear)			2 / 2
Braking wheels (front / rear)			2 / 2
Engine/Battery			
Engine brand / model			Yanmar - 3TNV88C
Engine norm			Stage V
I.C. Engine power rating / Power			36.20 Hp / 27.50 kW
Miscellaneous			
Ground Pressure			18.20 dan/cm2
Hydraulic Pressure			400 bar
Hydraulic tank capacity			94 l
Fuel tank			72 l
Noise to environment (LwA)			< 106 dB
Standards compliance			
This machine is in compliance with:			European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage)

\*Varies according to options and standards of the country to which the machine is delivered

## 220 TJ+ - Dimensional drawing

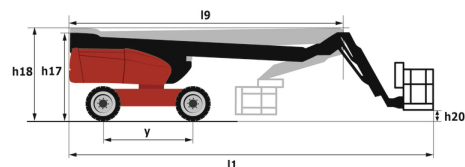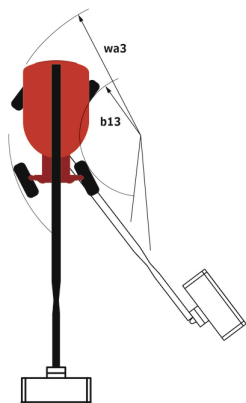

# Equipment

## Standard

230V Predisposition  
4 simultaneous movements  
4 wheel drive  
4 wheel steer with crab mode  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Backup electrical pump  
Basket 2,300 mm  
Connected machine  
Continuous turret rotation  
Differential locking on rear axle  
Easy fast slinging system  
Electronic platform compensation  
Emergency stop button in platform and on frame  
Engine mounted on sliding platform  
Engine with DPF  
Front axle with limited slip  
Fuel gauge with low level indicator  
Heavy-duty painted basket 2.30 m  
Hour meter  
Integrated diagnostic assistance  
LED rotating beacon  
LS pump  
Large color screen on turret  
Leveling unlocking  
Oscillating front axle  
Protective cover for control panel  
Remote control for transport  
Stop & Go system  
Turret orientation information

## Optional

110 or 230V plug with differential circuit breaker  
Additional storage boxes  
Battery blanket  
Battery cut-off  
Biodegradable oil  
Easy link - With remote lock  
Engine Block Heater  
Hydraulic oil heater  
Key lock on fuel tank  
Key lock on turret cover  
Narrow basket 1.80m  
Non marking solid tyres  
On-board generator (3,5 or 5 kW)  
Panel cradle  
Pipe cradle  
Safety kit - Harness + helmet  
Safety valve  
Screen protection on the lower box control  
Secondary Protection System (SPS)  
Socket 230 V + differential circuit breaker  
Spark arrester  
Special color paints  
Water predisposition  
Working light

## 220 TJ+ - Load chart

### Load Chart for MEWP Metric

