

nifty

90

TRAILER MOUNTED
ACCESS PLATFORM



9.50m (31ft 6in)
Working height

3.50m (11ft 6in)
Working outreach

Fully Proportional
Hydraulic Controls
Simple, reliable &
easy to maintain

Compact Outriggers
For setup in confined areas

Weight Saving
Chassis Design
Easily towed on the road
& manoeuvred on site

Telescopic Axle
Access through narrow
openings & doorways



niftylift.com




nifty 90

The Nifty 90 is the ideal alternative to ladders and scaffolds. Its compact design allows it to be set up in the most confined spaces. The telescopic axle allows it to pass through narrow openings and its simple, reliable hydraulic controls make even first time operation straightforward.

SAFETY FEATURES

- Pressure sensitive outriggers
- Audible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Hand Brake
- Harness Point
- CE Marked

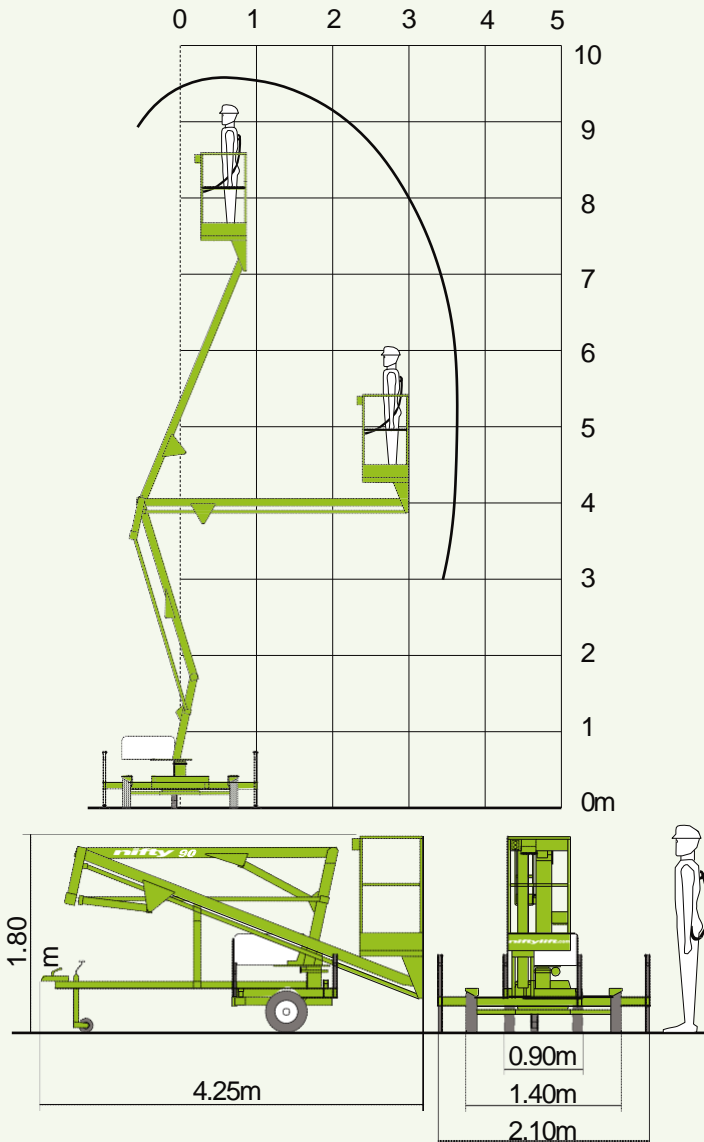

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The Nifty 90 has a telescopic axle allowing it to pass through a 0.90m (2ft 11in) opening and a harness point in the platform for operator safety when working.



The Nifty 90's working outreach makes it ideal for working over racking or machinery.

SPECIFICATIONS

Working Height	9.50m	31ft 6in
Platform Height	7.50m	24ft 6in
Working Outreach	3.50m	11ft 6in
Slew	360°	
Width - Travelling	1.40m	4ft 7in
- Working	2.10m	6ft 11in
- Axles Retracted	0.90m	2ft 11in
Height	1.80m	5ft 11in
Length	4.25m	13ft 11in
Weight	695kg*	1,530lbs*
Platform Capacity	120kg	265lbs
Platform Size	0.60m x 0.60m	2ft x 2ft
Control System	Fully Proportional Hydraulic	
Power System	Mains Only	
	Battery Only	

* Weights may vary according to specification / power options, please confirm before ordering.